


Dummy Rafter Tails

A useful technique for old-house remodelers
and those who build alone

by Bob Syvanen

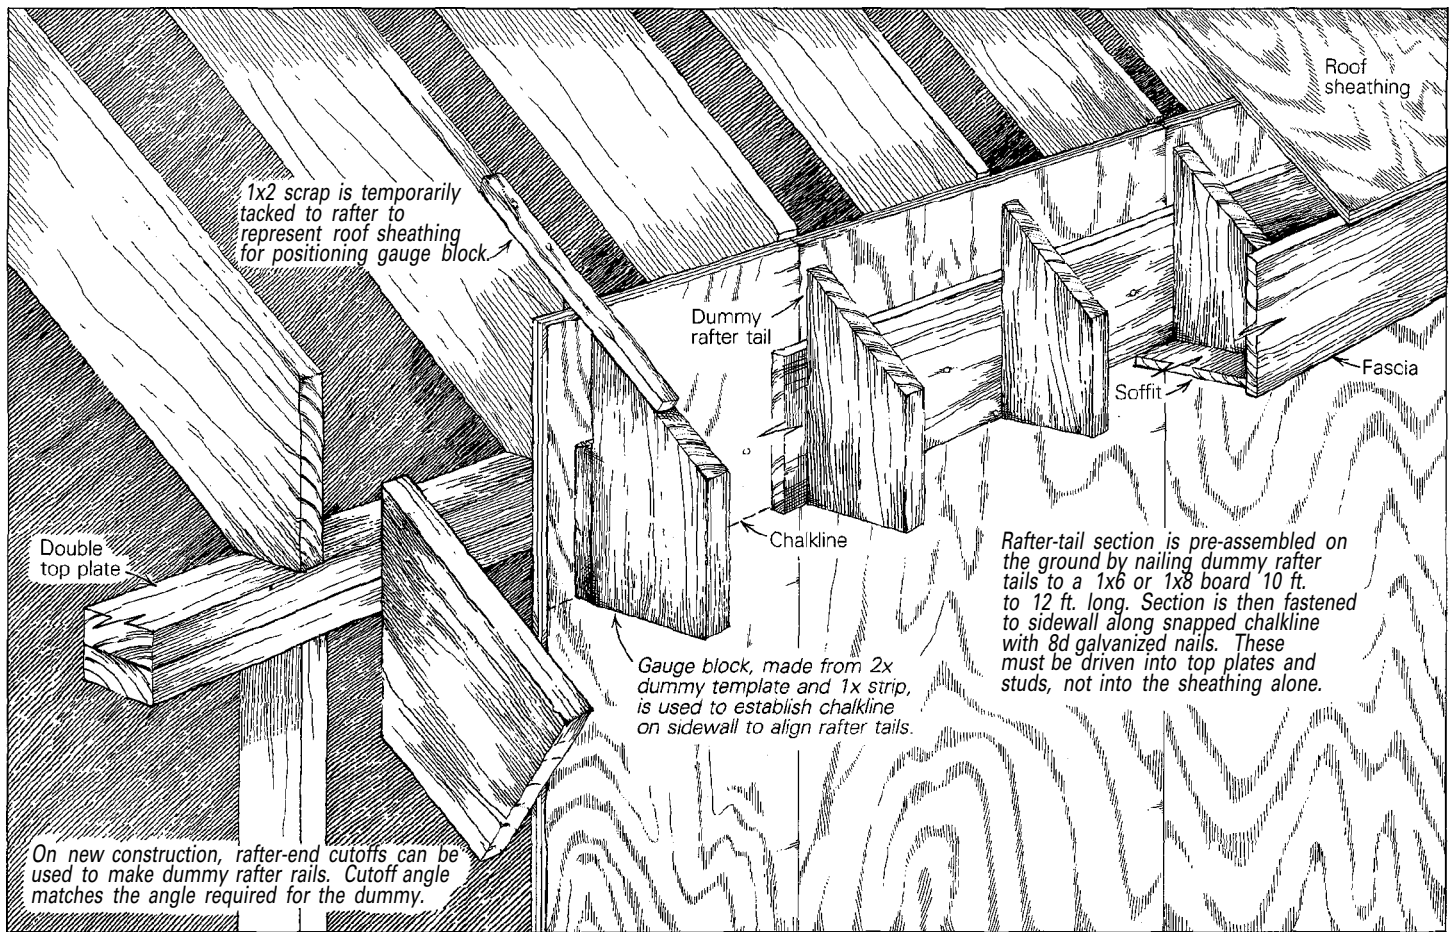

A leaky roof or a backed-up gutter often leads to eaves and rafter tails that are badly deteriorated. On older houses, there's simply nothing solid to nail new fascia and soffit trim to. To deal with this problem, I cut the old rafter tails back flush with the siding, nail dummy 2x6 block rafter tails to a 1x board, and nail this in turn through the sheathing to the top plate, the cut-back rafter ends, or to both.

I've found that this dummy rafter-tail system also makes it easy for one person to nail up rafters on a new house. This procedure also eliminates the need to cut and install frieze blocks between rafters atop the plates. I extend the plywood siding 4 in. to 6 in. above the top plate, and it holds the bottom end of the rafter in place while I nail the ridge end. This sometimes lets me get away with using standard-length (20-ft. or less) rafter stock instead of hav-

ing to special-order something longer. In these cases, I make up the blocks from the scrap lumber that's all over the job site. When length isn't a problem, I use cutoffs from the rafters themselves for the dummy tails. They've already got the correct angle cut at one end, so I have only to cut them to length and width.

Step by step—Not all framing material is a consistent width, so if I'm making up my dummy rafter tails from 2x6 stock, I begin by running the block stock through a table saw to make sure all the pieces are the same width. I cut as many rafter-tail blocks as there are rafters, then nail them to a 1x6 or 1x8 board. On a house 36 ft. long, I make up three 12-ft. sections for each side—longer lengths are too unwieldy.

To position the block strip, I use a gauge block made up of a rafter-tail block with a piece

of 1x stock nailed to the back. I align the gauge block with the top of the rafter (on new construction, a 1x2 temporarily tacked to the rafter top to represent roof sheathing helps here), hold it against the sidewall sheathing, and mark the bottom. It's best to mark both ends of the wall and the middle, then snap a line the full length. This will show up any variation that might have resulted from the guide marks having been taken off a high or low rafter. To get a good longline snap, I thumb the middle of the line and snap each side.

Once the dummy rafter tails are in place, I install the roof sheathing over them, tying the whole business together. The end result is rafter tails that line up straight as string. □

Bob Syvanen is a consulting editor of Fine Homebuilding magazine.